

KVM 42 Concrete Pump


Truck Mounted Concrete Pump with 4-Section Placing Boom


The KVM 42 is one of the most popular longer booms – with a reach of 42-meters it is certain to be the boom of choice for many commercial jobs.

Boom Specifications	U.S.	Metric
Pipeline Diameter	5"	125 mm
Vertical reach	138'	42 m
Reach From Slewing Axis	125'	38 m
Net Horizontal reach	115'	35 m
Unfolding Height	32' - 11"	10 m

Section Lengths:

First Section	33' - 10"	10.3 m
Second Section	30' - 4"	9.24 m
Third Section	30' - 4"	.24 m
Fourth Section	30' - 4"	9.24 m
Slewing Range	380 deg.	380 deg.
End hose Length	12' - 5"	3.8 m



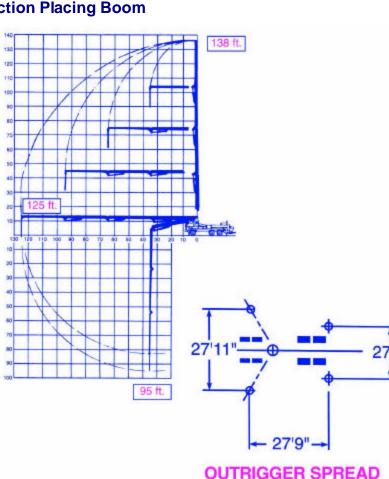

Some of Southwest Concrete Pumping's Fleet:



